A Series


A3124MG100E



Features

- Gigabit Ethernet interface, providing 1Gbps bandwidth with a maximum transmission distance of 100m;
- 128MB on-board cache for data transmission or image resend;
- Support Software Trigger/Hardware Trigger/Free Run Mode;
- Support ISP functions including Sharpness/Denoising/Gamma/LUT/BlackLevel Correction/TargetBrightness/Contrast etc.;
- Color cameras support interpolation, white balance, color conversion matrix, chroma, saturation, etc.;
- Support multiple image data formats output/ROI/Mirror, etc.;
- Conform to GigE Vision V2.0 protocol and GenICam standard;
- DC 9V~24V wide voltage power supply;
- Conform to CE, RoHS;

Dimensions (mm)

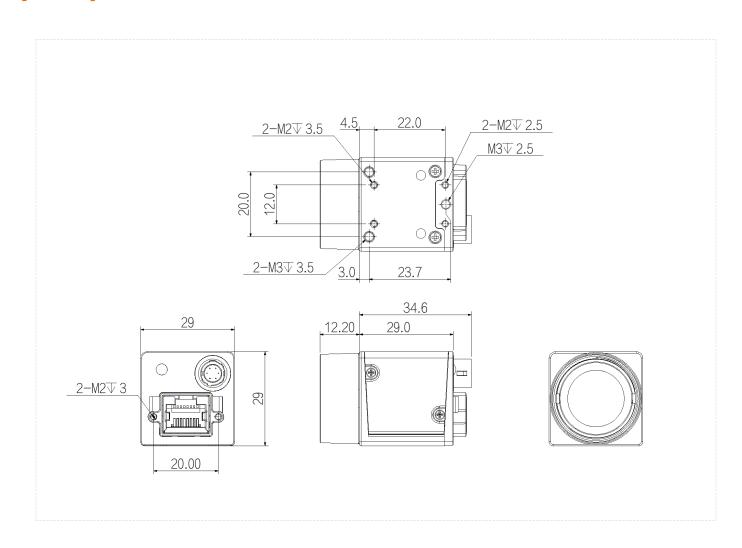



Specification

	Model	A3124MG100E
	Sensor	AR0135
	Image Sensor	1/3"CMOS
	Shutter	Global
D	Resolution	1280 × 960
Basic	Frame Rate	54 fps
	Bit Depth	12
	Mono/Color	Mono
	Pixel Size	3.75 μm × 3.75 μm
	Pixel	1.2MP
	S/N Ratio	40.7dB
	Dynamic Range	71.1dB
	Image Format	Mono8/10/10Packed/12/12Packed
	Binning	Support
Image	ROI	Support
	Gain	1~32
	Gamma	From 0 to 4, support LUT
	Exposure Time	18.7µS~1S
	Trigger Mode	Software Trigger/Hardware Trigger/Free Run Mode
	SPC	Support
Performance	User Setting	Support two sets of user-defined configurations
Periormance	Image Buffer	128MB
	Port	GigE
Port	GPIO Interface	1x 6 pin Hirose: 1x Opto-isolated input, 1x Opto-isolated output, 1 configurable input and output
	Lens Mount	C-mount
Power	Power Supply	DC 9V~24V power supply via Hirose interface
Power	Power Consumption	12V≈2.8W
Ctrusteers	Product Dimensions	29mm×29mm
Structure	Net Weight	60 g
Environ manage	Storage Temperature	-30°C~+80°C
Environment	Operating Temperature	0°C~+50°C



Connector Pin-out

Pin	Description	Features	Definition of 6-pin power port
1	-	+9VDC to 24VDC power supply	
2	Line1	Opto-isolated input	
3	Line2	GPIO (I/O can be configured for non-isolated software)1	
4	Lineo	Opto-isolated output	
5	-	Opto-isolated signal ground (ISO_GND)	
6	-	Camera DC power ground and GPIO signal ground (GND)	

Spectrogram

