

A Pro Series


AH3600CU000E



Features

- USB3.0 interface, 5Gbps theoretical transfer bandwidth, power supply via USB interface ;
- Compact size of 29mmx29mmx30mm;
- 256MB on-board cache for data transmission or image resend;
- Support Software Trigger/Hardware Trigger/Free Run Mode;
- Support ISP functions including Gamma,LUT,BlackLevel ,Correction,TargetBrightness,Contrast,FFC,Denoising Sharpness,BalanceWhite,CCM,ColorAdjustment,Multi-color temperature adjustment, multi-function interpolation adjustment etc.;
- Support multiple image data formats output,ROI,Binning(Including Pixel arbitrary scaling),Mirror, AutoFunction,Sequencer (Gain、 Exposure) etc.;
- Compatible with USB3.0 Vision protocol and GenICam standard;
- Conform to CE/UKCA/UL/KC,RoHS;

Dimensions (mm)

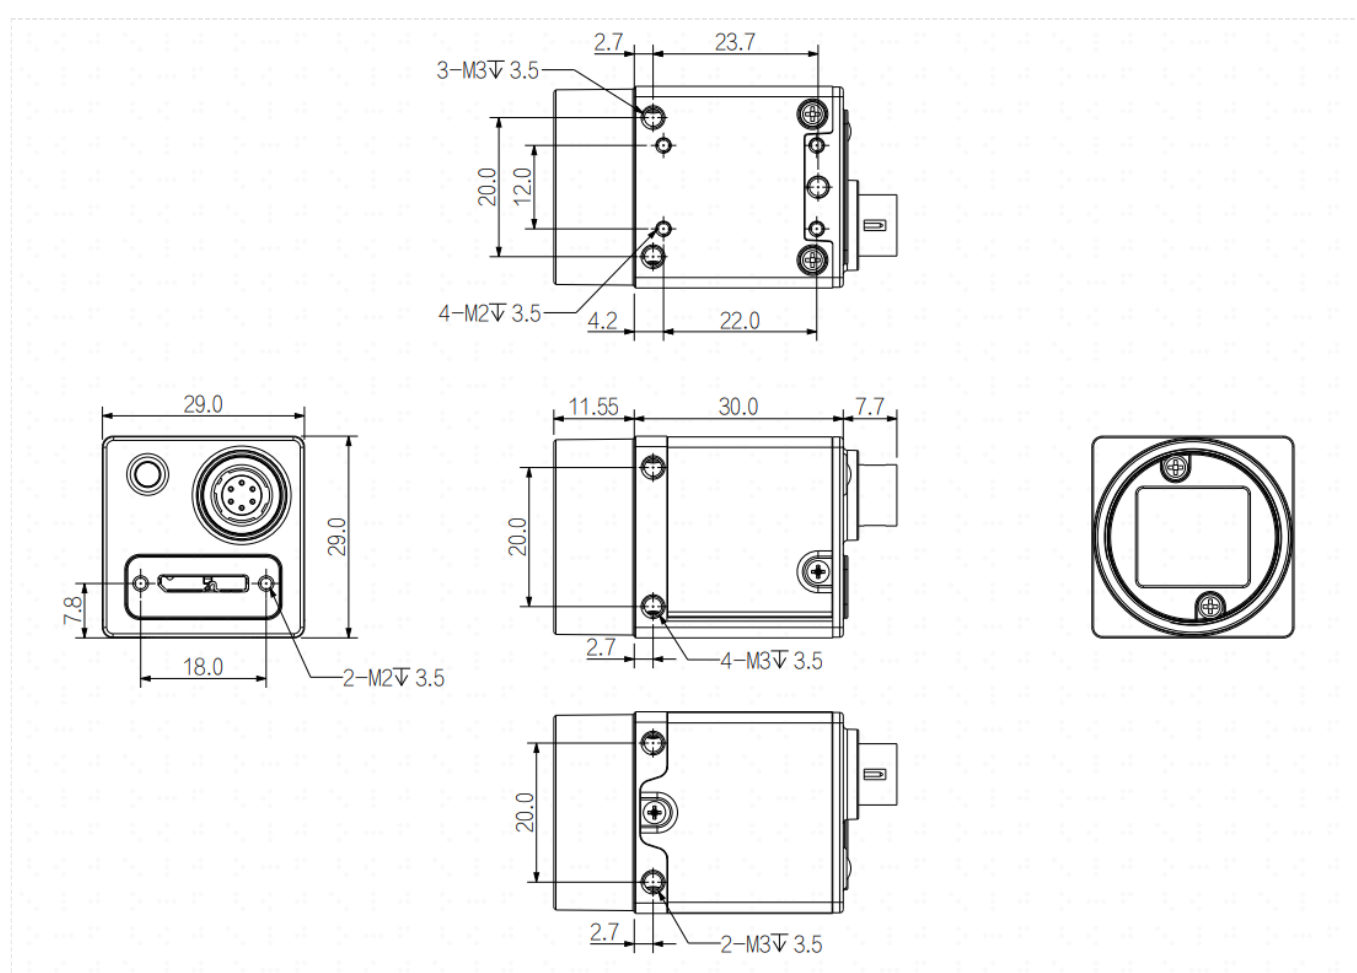

Specification

Model		AH3600CU000E
Basic	Sensor	IMX178
	Image Sensor	1/1.8"CMOS
	Shutter	Rolling/GlobalResetRealease
	Resolution	3072 × 2048
	Frame Rate	60 fps @3072 × 2048 Bayer RG 8
	Bit Depth	12
	Mono/Color	Color
	Pixel Size	2.4 μm × 2.4 μm
Image	Pixel	6.0 MP
	S/N Ratio	41.4 dB
	Dynamic Range	71.7 dB
	Image Format	Mono 8/10/12, Bayer RG 8/10/10Packed/12/12Packed,YUV422_8_UYVY,YUV422_8,RGB8,BGR8
	Binning	off/onebytwo/twobyone/twobytwo/onebyfour/fourbyone/twobyfour/fourbytwo/fourbyfour/ThreebyThree
	ROI	Support
	X Flip	Support
	Y Flip	Support
	Gain	1 ~ 32X
	Gamma	From 0 to 3.99998, support LUT
	Exposure Time	25 μs ~ 2.5 sec
	Trigger Mode	Software Trigger/Hardware Trigger/Free Run Mode
	SPC	Support
Performance	User Setting	Support three sets of user-defined configurations
	Image Buffer	256MB
Port	Port	USB 3.0
	GPIO Interface	1× 6 pin Hirose: 1× Opto-isolated input, 1× Opto-isolated output, 1 configurable input and output
	Lens Mount	C-mount
Power	Power Supply	Power supply via USB connector /DC power supply by Hirose connector, with voltage range from 9V to 24V
	Power Consumption	≈2.7W(USB3.0 provide power supply)
Structure	Product Dimensions	29 mm×29 mm×30 mm (not including lens mount and rear case connector)
	Net Weight	Approx 85g
Environment	Storage Temperature	-30℃~+80℃


	Operating Temperature	-30℃~+50℃
--	-----------------------	-----------

Connector Pin-out

Definitions of camera 6-pin ports:

Pin	Description	Features
1	-	+9VDC to 24VDC power supply
2	Line1	Opto-isolated input
3	Line2	GPIO (I/O can be configured for non-isolated software) ¹
4	Lineo	Opto-isolated output
5	-	Opto-isolated signal ground (ISO_GND)
6	-	Camera DC power ground and GPIO signal ground (GND)

Definition of 6-pin power port

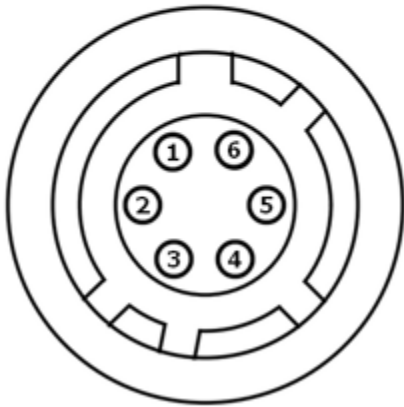

Spectrogram

