

# Data Cable


C01-10GE-RJ45-RJ45-FC-7M



## Features

- 1、Support highspeed 10 Gigabit Ethernet, stable transmission
- 2、RJ45 with screws, reliable connection camera
- 3、With shielding layer design, to ensure anti-external electromagnetic interference
- 4、With excellent flexibility, to meet the tank chain mobile installation applications
- 5、Specific good wear resistance, cold resistance, flame retardant
- 6、Conform to RoHS 2.0

## Dimensions (mm)

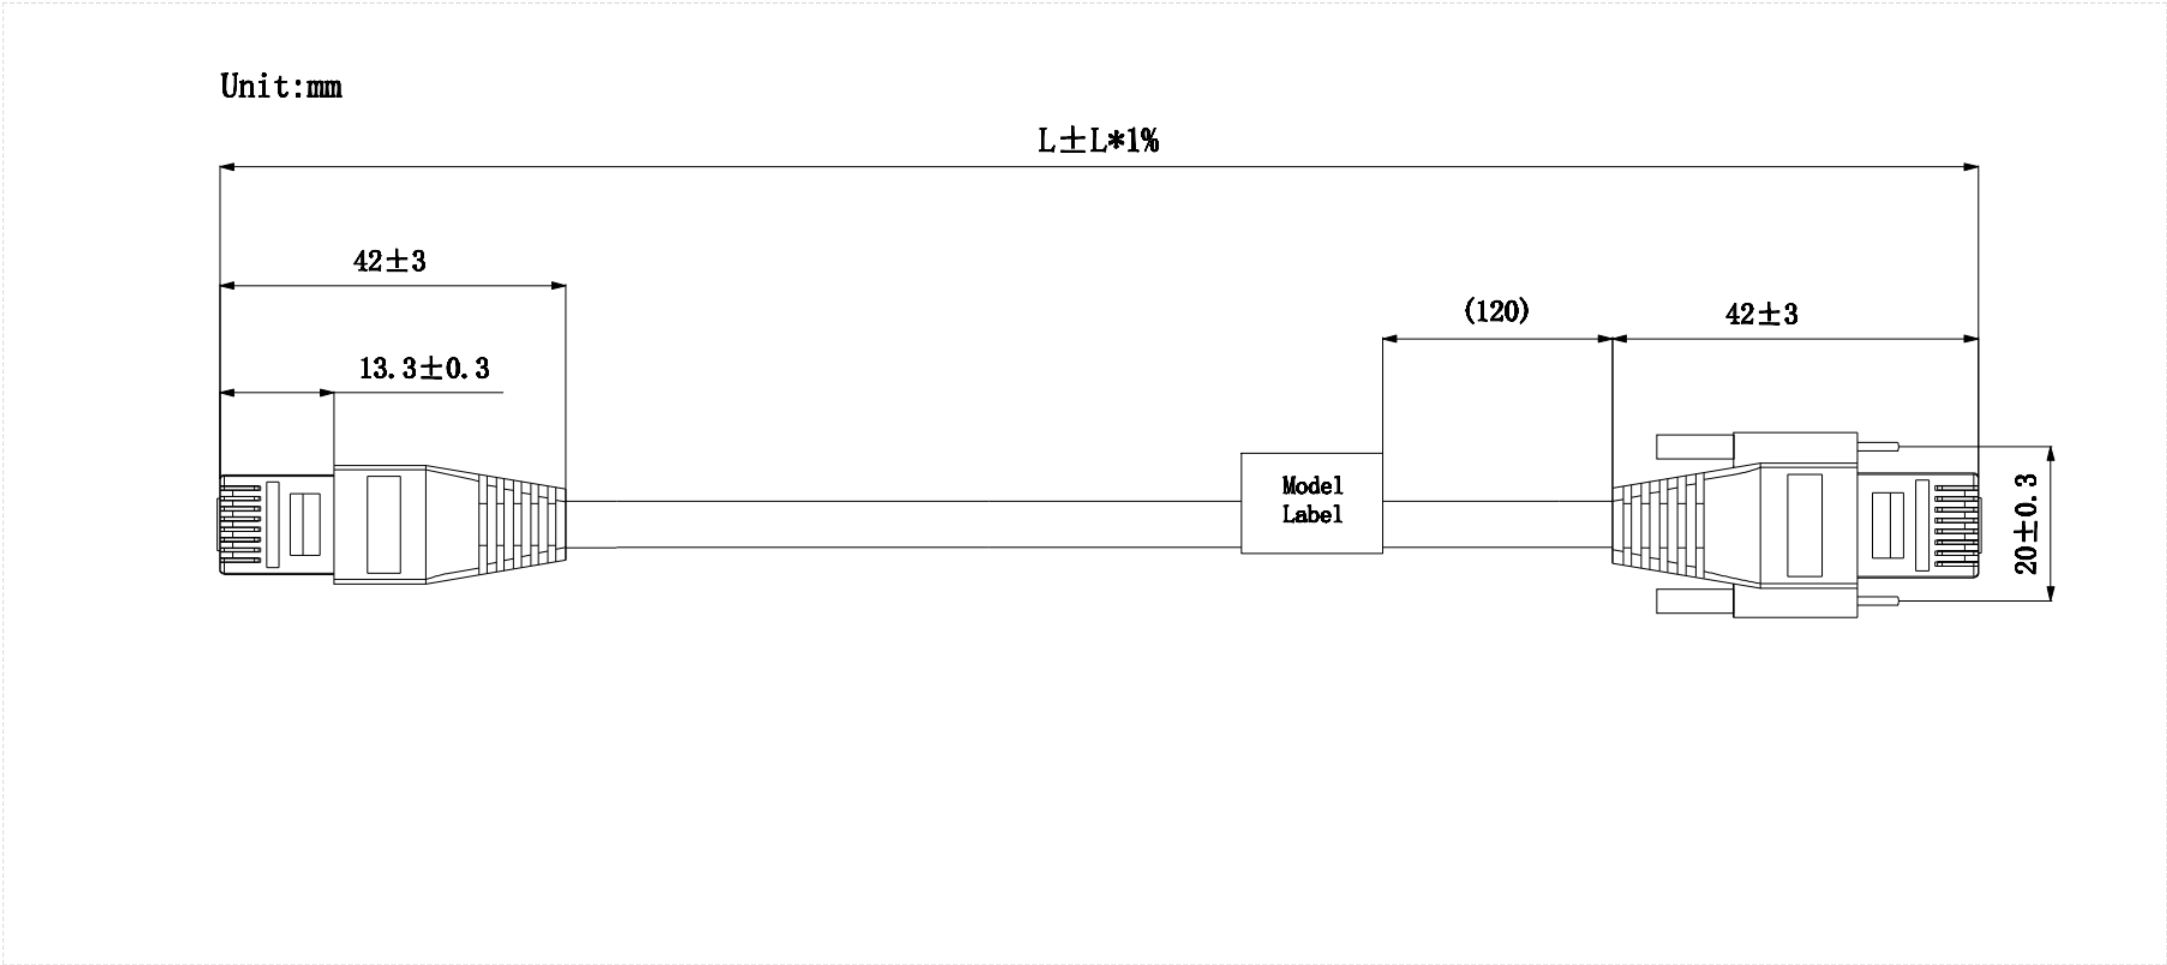

Specification

|             |                                         |                                          |
|-------------|-----------------------------------------|------------------------------------------|
| Model       |                                         | C01-10GE-RJ45-RJ45-FC-7M                 |
| Basic       | Model                                   | C01-10GE-RJ45-RJ45-FC-7M                 |
|             | Category                                | 10 Gigabit Ethernet cable (RJ45 to RJ45) |
|             | Appearance Color                        | Black                                    |
|             | Length                                  | 7m                                       |
|             | End A Connector                         | RJ45 (with locking stud)                 |
|             | End B Connector                         | RJ45                                     |
| Structure   | Cable Structure                         | (26AWG*1P+NW)*4C+NW+AB                   |
|             | Cable Diameter                          | 6.8mm                                    |
|             | Cable Sheath                            | PVC                                      |
|             | Connector Durability                    | ≥750 cycles                              |
|             | Min Bending Radius                      | 70mm                                     |
|             | Applicable Scenes                       | Dynamic scene                            |
|             | Number of Cycles Rubber Tracks Complete | 10 million cycles                        |
|             | Packaging Method                        | Individual package bag                   |
| Hardware    | Max Operating Voltage                   | 30 VDC                                   |
|             | Certifications                          | RoHS2.0                                  |
| Environment | Operating Temperature                   | -20℃ ~ 80℃                               |