

# Power Cable & IO Cable

C01-IO-12PIN-FC-3M




## Features

- 1、The 12-pin Power&I/O Cable can be used to power the camera, I/O signal wiring
- 2、Aviation head connector, reliable connection camera
- 3、With shielding layer design, to ensure anti-external electromagnetic interference
- 4、With excellent flexibility, to meet the tank chain mobile installation applications
- 5、Specific good wear resistance, cold resistance, flame retardant
- 6、Conform to RoHS 2.0

## Dimensions (mm)

Unit:mm

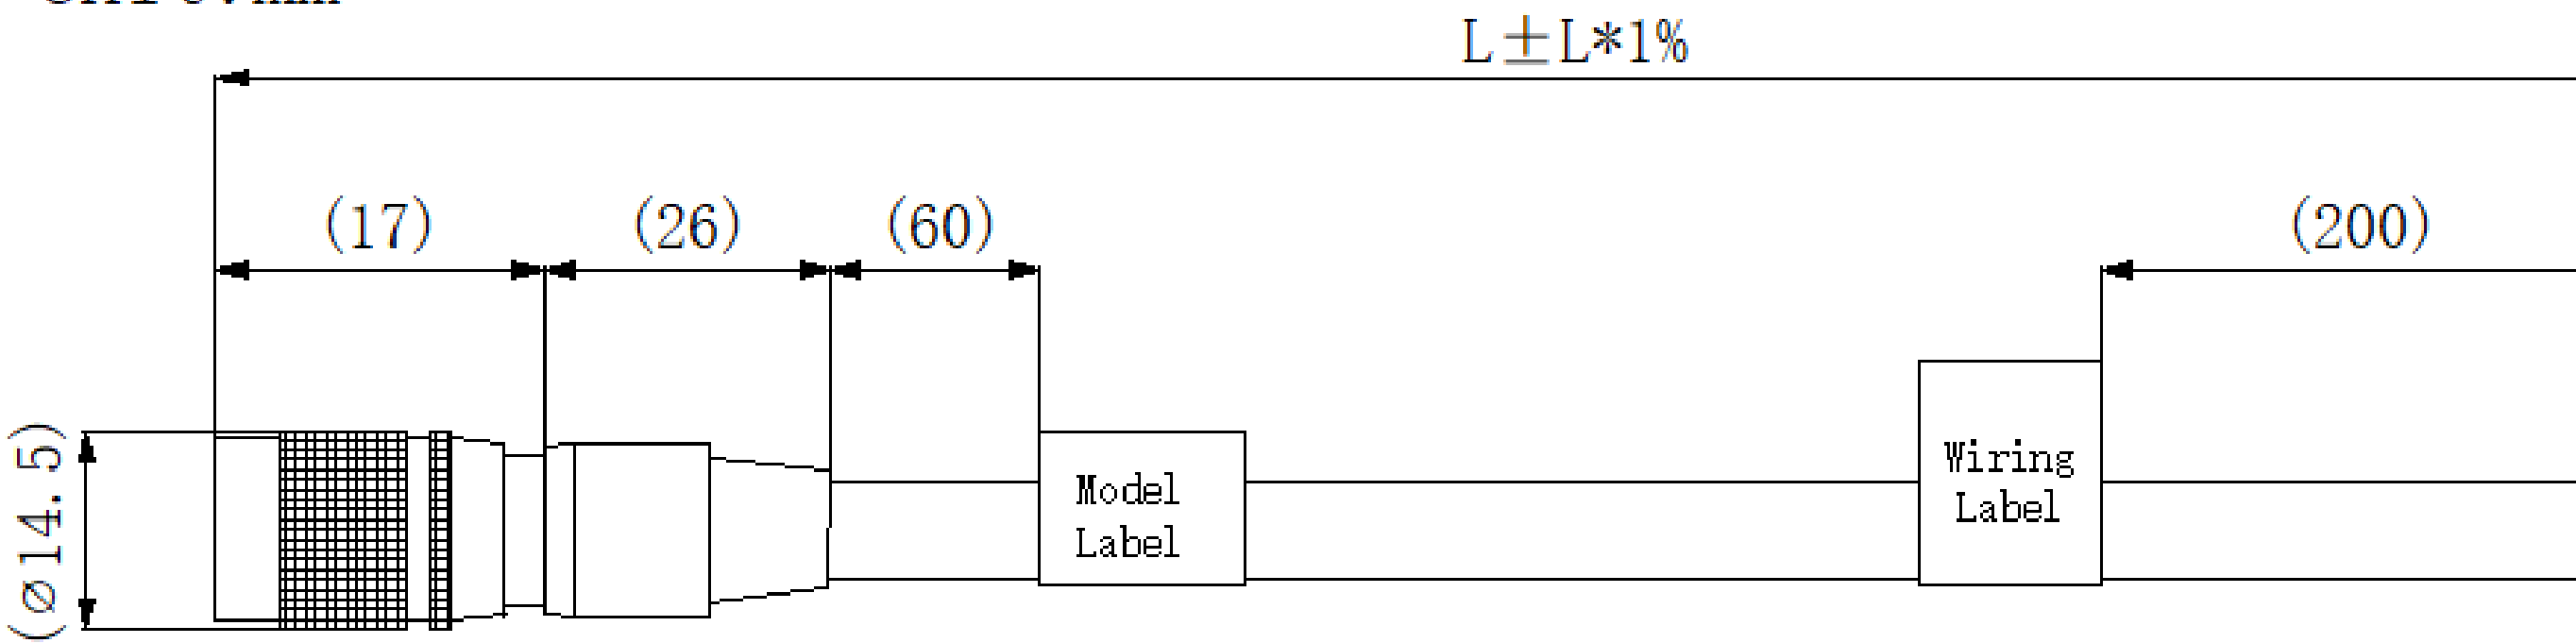

Specification

|             |                                         |                               |
|-------------|-----------------------------------------|-------------------------------|
| Model       |                                         | C01-IO-12PIN-FC-3M            |
| Basic       | Model                                   | C01-IO-12PIN-FC-3M            |
|             | Category                                | 12Pin Power&I/O Dynamic Cable |
|             | Appearance Color                        | Black                         |
|             | Length                                  | 3m                            |
|             | End A Connector                         | 12-pin , Female               |
|             | End B Connector                         | Open                          |
| Structure   | Cable Structure                         | 26AWG*6P+P+B                  |
|             | Cable Diameter                          | 7.0mm                         |
|             | Cable Sheath                            | TPE                           |
|             | Connector Durability                    | ≥750 cycles                   |
|             | Min Bending Radius                      | 75mm                          |
|             | Applicable Scenes                       | Dynamic scenes                |
|             | Number of Cycles Rubber Tracks Complete | 10 million cycles             |
|             | Packaging Method                        | Individual package bag        |
| Hardware    | Max Operating Voltage                   | 30 VDC                        |
|             | Certifications                          | RoHS2.0                       |
| Environment | Operating Temperature                   | -20℃ ~ 80℃                    |