

Power Cable & IO Cable

C02-IO-6PIN-DC-FC-25M




Features

- 1、The 6-pin Power&I/O Cable can be used to power the camera, I/O signal wiring
- 2、Aviation head connector, reliable connection camera
- 3、With shielding layer design, to ensure anti-external electromagnetic interference
- 4、With excellent flexibility, to meet the tank chain mobile installation applications
- 5、Specific good wear resistance, cold resistance, flame retardant
- 6、Conform to RoHS 2.0

Dimensions (mm)

Unit:mm

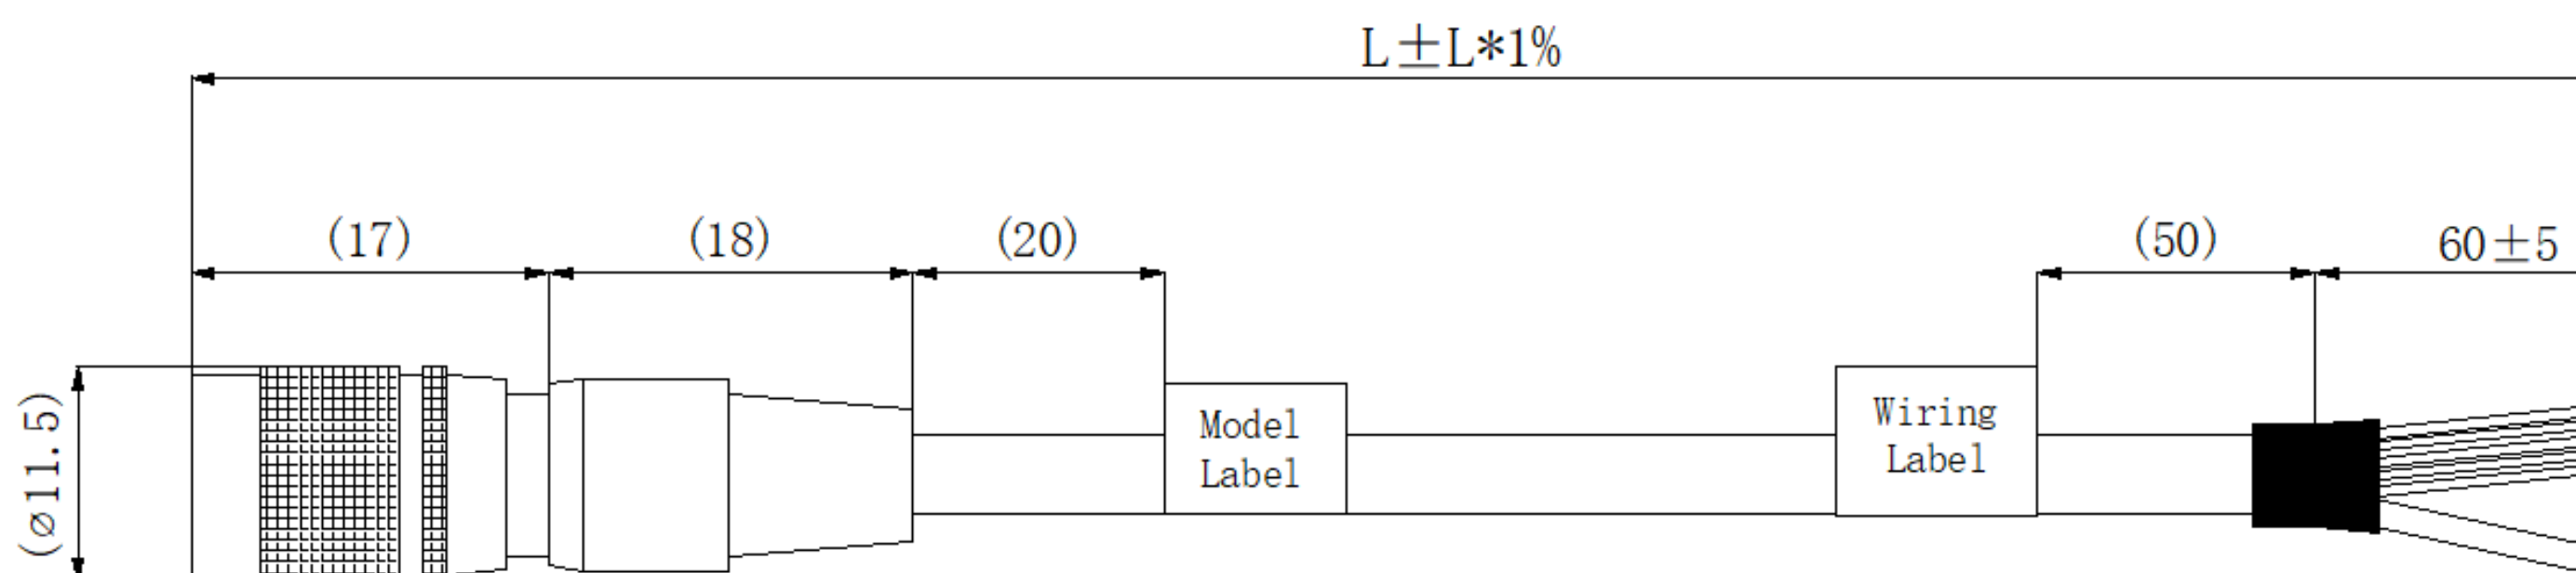

Specification

Model		C02-IO-6PIN-DC-FC-25M
Basic	Model	C02-IO-6PIN-DC-FC-25M
	Category	6Pin Power&I/O Dynamic Cable
	Appearance Color	Black
	Length	25m
	End A Connector	6-pin , Female
	End B Connector	Open (With DC5.5 female)
Structure	Cable Structure	23AWG*1P+26AWG*2P+AB
	Cable Diameter	5.6mm
	Cable Sheath	PVC
	Connector Durability	≥750 cycles
	Min Bending Radius	55mm
	Applicable Scenes	Dynamic scene
	Number of Cycles Rubber Tracks Complete	10 million cycles
	Packaging Method	Individual package bag
Hardware	Max Operating Voltage	30 VDC
	Certifications	RoHS2.0 , UL
Environment	Operating Temperature	-20℃ ~ 80℃