

Data Cable

C02-U3-AM-MicroB-1.5M




Features

- 1、Suitable for USB3.0 industrial cameras,Maximum transmission rate 5.0Gbps
- 2、Micro B with screws, reliable connection camera
- 3、With shielding layer design, to ensure anti-external electromagnetic interference
- 4、Specific good wear resistance, cold resistance, flame retardant
- 5、Conform to RoHS 2.0

Dimensions (mm)

Unit:mm

$L \pm L \times 1\%$

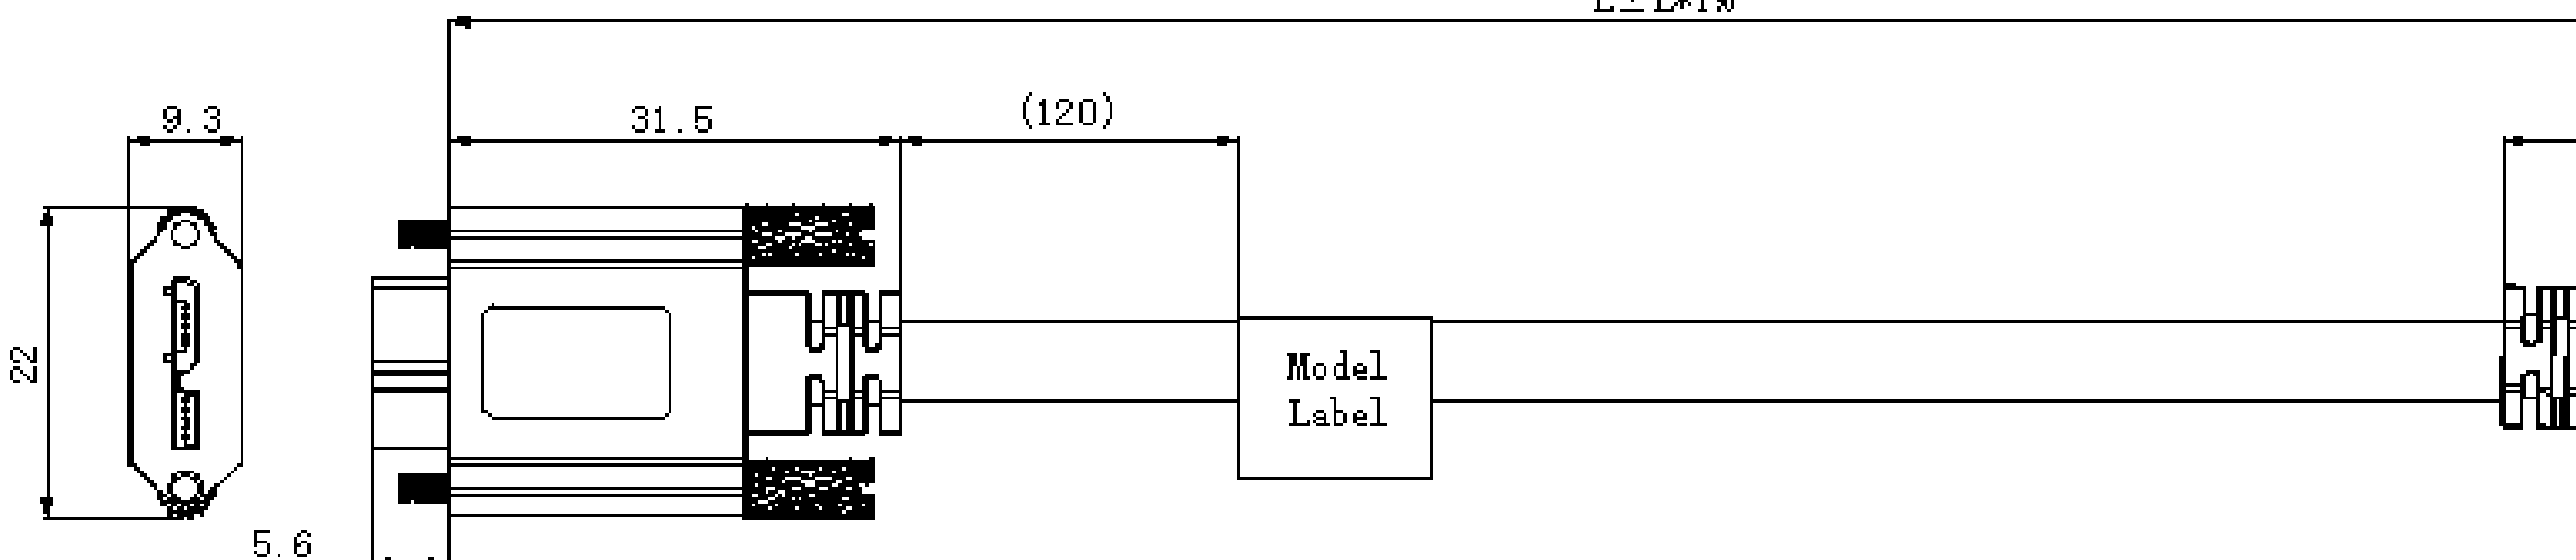

/ Specification

Model		C02-U3-AM-MicroB-1.5M
Basic	Model	C02-U3-AM-MicroB-1.5M
	Category	USB3.0 data cable (Micro B to Type A)
	Appearance Color	Black
	Length	1.5m
	End A Connector	Micro-B male (with locking stud)
	End B Connector	Type A male
Structure	Cable Structure	{(26AWG*2+EAM)*2P+26AWG*1P+24AWG*2C} AL FOIL+BRAID
	Cable Diameter	6.8mm
	Cable Sheath	PVC
	Connector Durability	≥750 cycles
	Min Bending Radius	70mm
	Applicable Scenes	Static scenes
	Packaging Method	Individual package bag
Hardware	Max Operating Voltage	30 VDC
	Certifications	RoHS2.0
Environment	Operating Temperature	-20℃ ~ 80℃