

Data Cable


C03-CL-SDR-SDR-PoCL-FC-7M



Features

- 1、 Suitable for Camera Link industrial cameras
- 2、 SDR26 with screws, reliable connection camera
- 3、 With shielding layer design, to ensure anti-external electromagnetic interference
- 4、 With excellent flexibility, to meet the tank chain mobile installation applications
- 5、 Specific good wear resistance, cold resistance, flame retardant
- 6、 Conform to RoHS 2.0 & UL

Dimensions (mm)

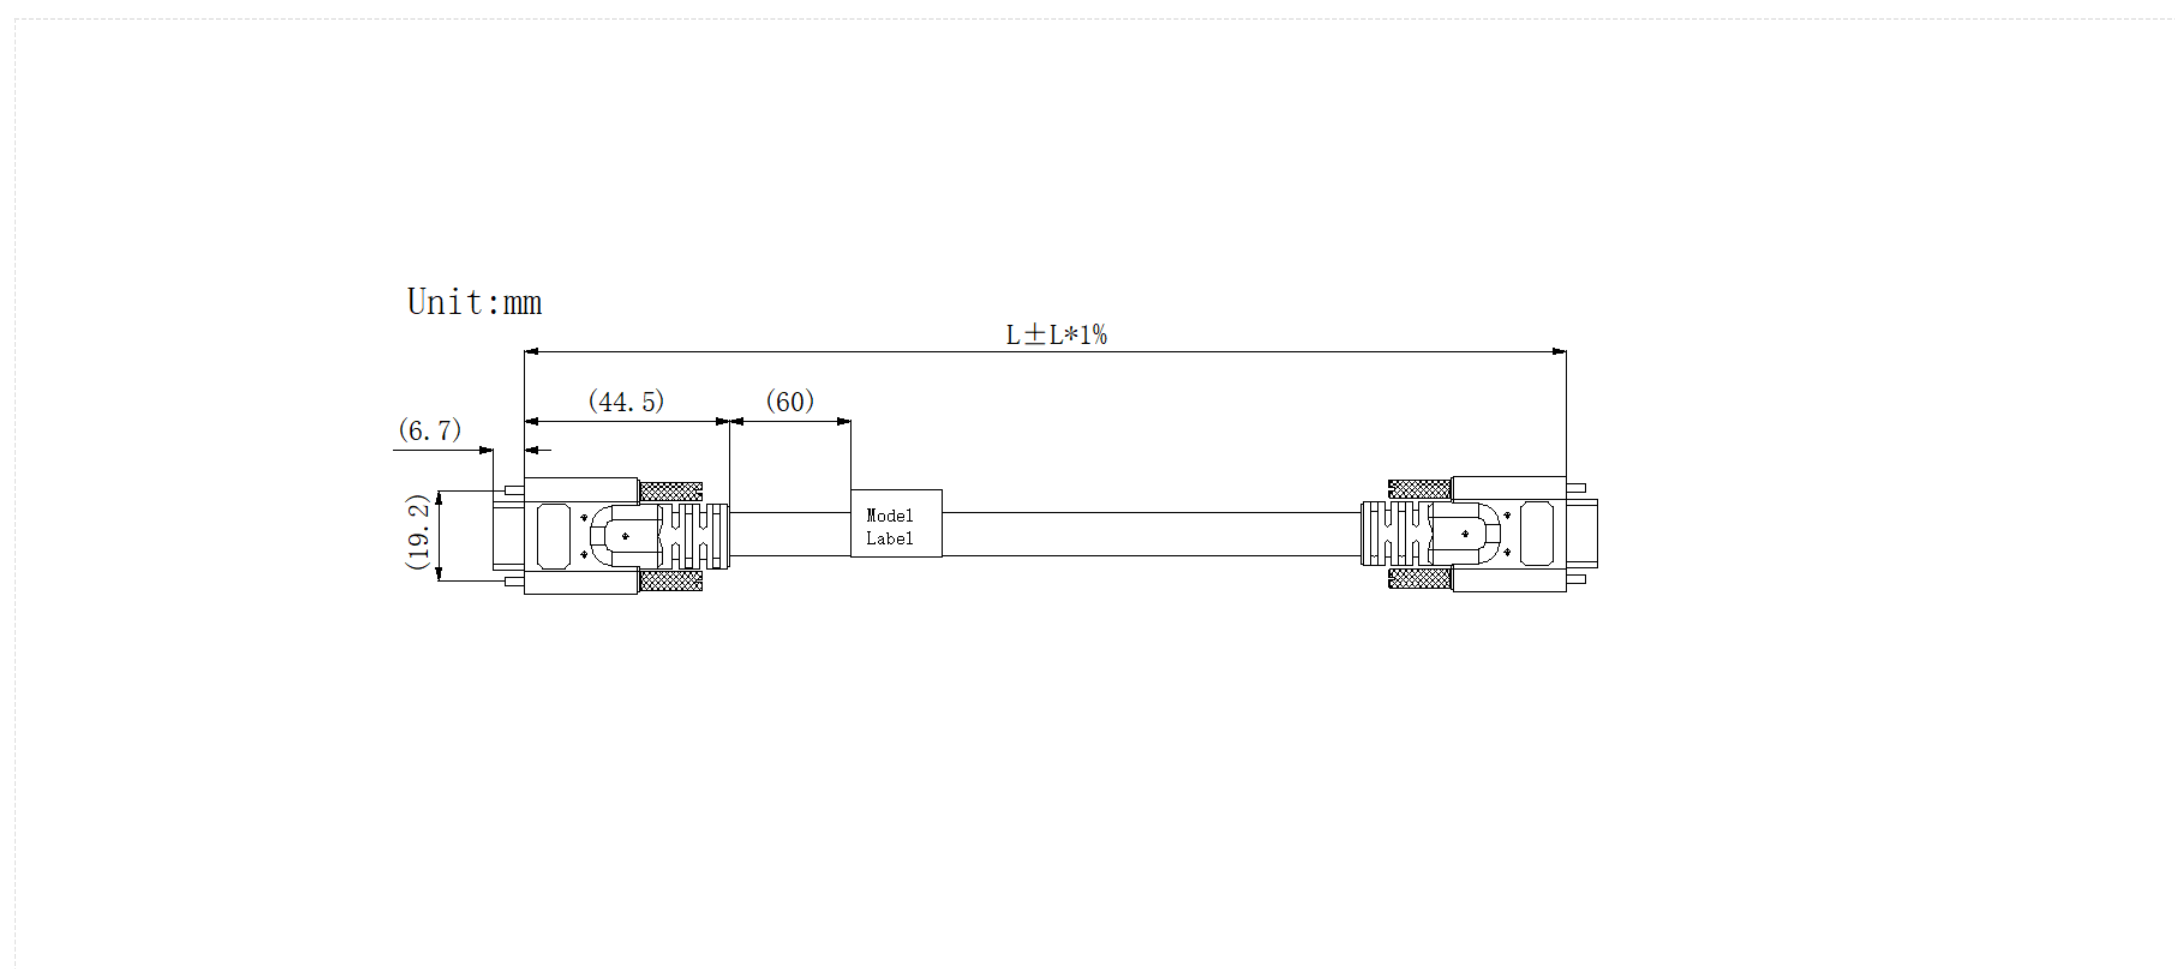

Specification

	Model	C03-CL-SDR-SDR-PoCL-FC-7M
Basic	Model	C03-CL-SDR-SDR-PoCL-FC-7M
	Category	Camera Link data cable (SDR to SDR)
	Appearance Color	Black
	Length	7m
	End A Connector	SDR26
	End B Connector	SDR26
Structure	Cable Structure	28AWG+ML+AL+B
	Cable Diameter	9.5mm
	Cable Sheath	PVC
	Connector Durability	≥750 cycles
	Min Bending Radius	100mm
	Applicable Scenes	Dynamic scenes
	Number of Cycles Rubber Tracks Complete	10 million cycles
	Packaging Method	Individual package bag
Hardware	Max Operating Voltage	30 VDC
	Certifications	RoHS2.0
Environment	Operating Temperature	-20°C ~ 80°C