

# Data Cable

C03-CXP6-DIN-DIN-FC-3M




## Features

- 1、Suitable for CoaXPress industrial cameras,transmission rate 6.25Gbps
- 2、Adopting coaxial cable design, with a small diameter
- 3、With shielding layer design, to ensure anti-external electromagnetic interference
- 4、With excellent flexibility, to meet the tank chain mobile installation applications
- 5、Specific good wear resistance, cold resistance, flame retardant
- 6、Conform to RoHS 2.0

## Dimensions (mm)

Unit:mm

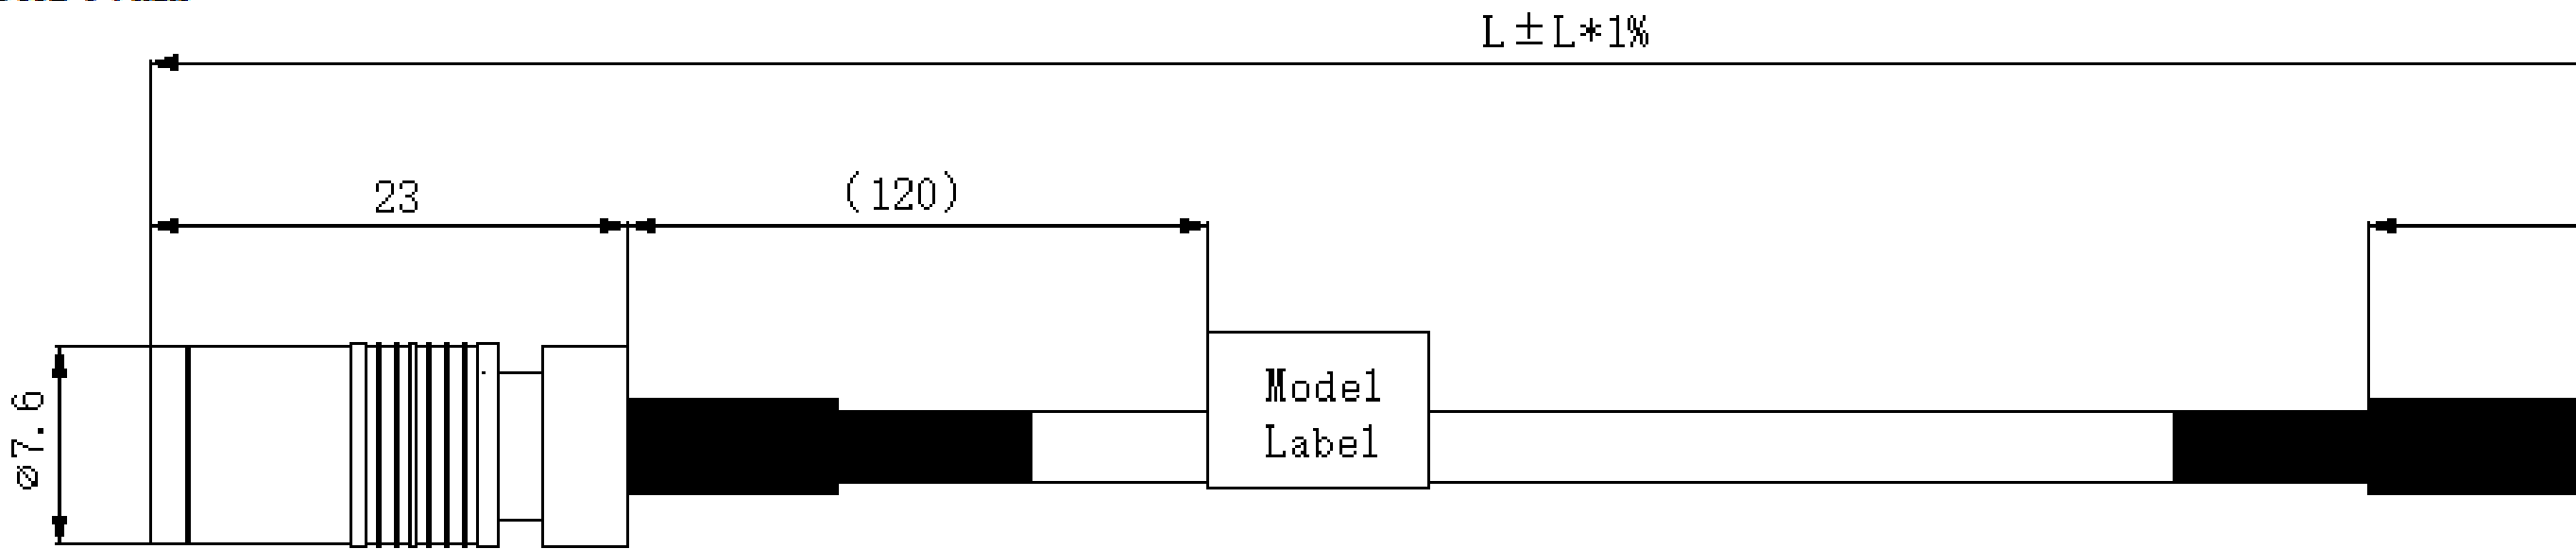

/ Specification

Model		C03-CXP6-DIN-DIN-FC-3M
Basic	Model	C03-CXP6-DIN-DIN-FC-3M
	Category	CoaXPress data cable (DIN to DIN)
	Appearance Color	Black
	Length	3m
	End A Connector	DIN1.0/2.3
	End B Connector	DIN1.0/2.3
Structure	Cable Structure	24AWG*1C+B+P
	Cable Diameter	4.5mm
	Cable Sheath	PVC
	Connector Durability	≥500次插拔循环
	Min Bending Radius	50mm
	Applicable Scenes	Dynamic scenes
	Number of Cycles Rubber Tracks Complete	8 million cycles
	Packaging Method	Individual package bag
Hardware	Max Operating Voltage	30 VDC
	Certifications	RoHS2.0
Environment	Operating Temperature	-20℃ ~ 80℃