

Data Cable

C03-U3-AM-MicroB-FC-3M




Features

- 1、Suitable for USB3.0 industrial cameras,Maximum transmission rate 5.0Gbps
- 2、Micro B with screws, reliable connection camera
- 3、With shielding layer design, to ensure anti-external electromagnetic interference
- 4、With excellent flexibility, to meet the tank chain mobile installation applications
- 5、Specific good wear resistance, cold resistance, flame retardant
- 6、Conform to RoHS 2.0

Dimensions (mm)

Unit:mm

$L \pm L \times 1\%$

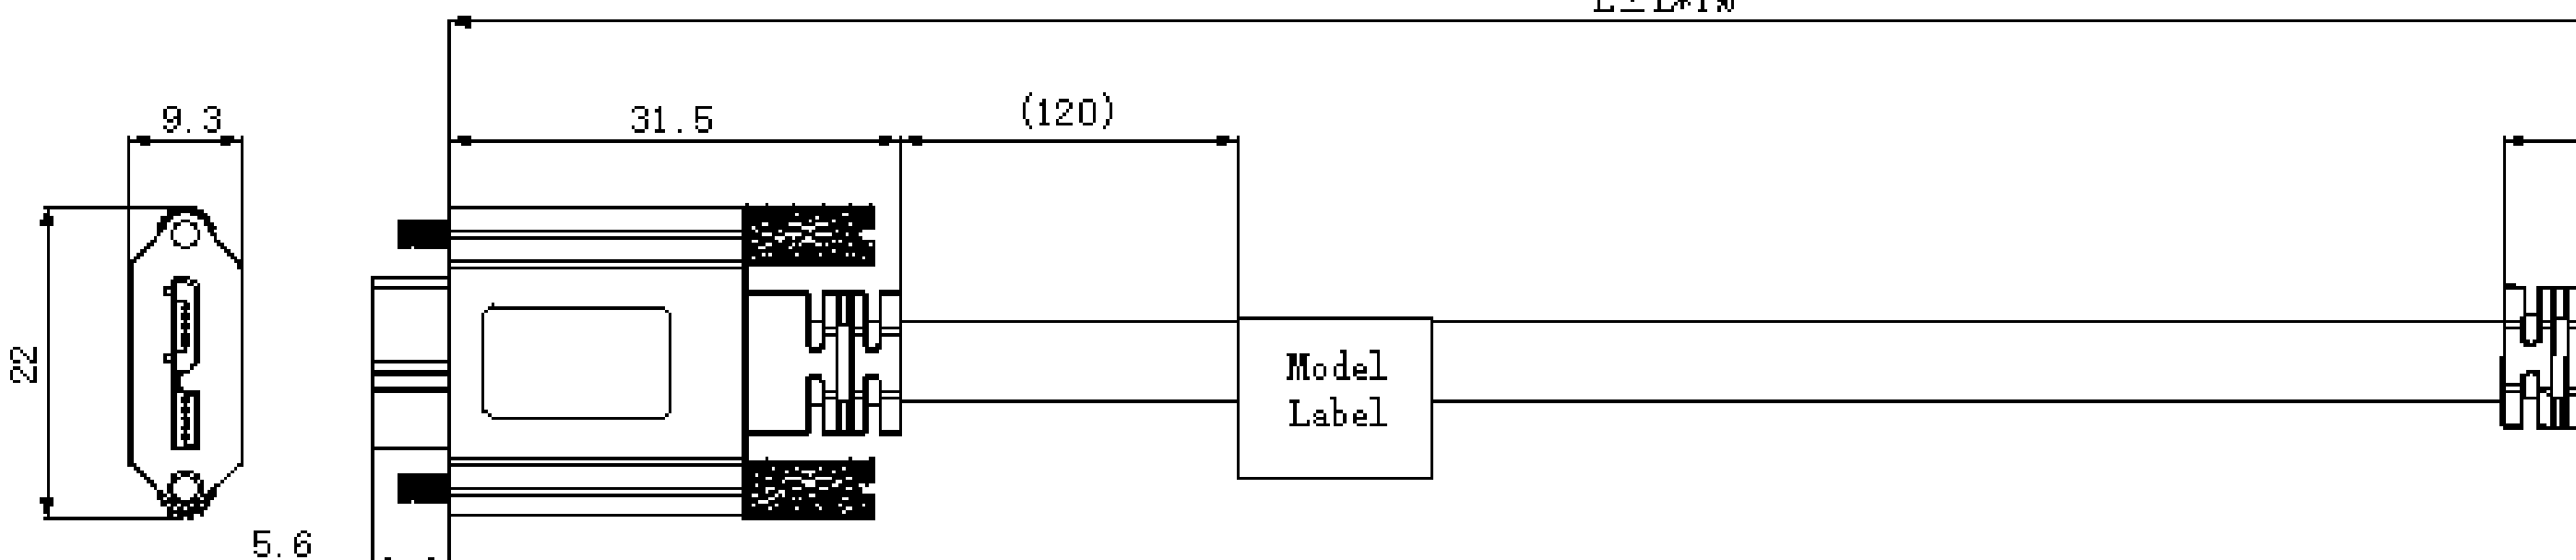

Specification

Model		C03-U3-AM-MicroB-FC-3M
Basic	Model	C03-U3-AM-MicroB-FC-3M
	Category	USB3.0 data cable (Micro B to Type A)
	Appearance Color	Black
	Length	3m
	End A Connector	Micro-B male (with locking stud)
	End B Connector	Type A male
Structure	Cable Structure	{(26AWG*2+EAM)*2P+26AWG*1P+22AWG*2C} AL FOIL+BRAID
	Cable Diameter	6.8mm
	Cable Sheath	PVC
	Connector Durability	≥750 cycles
	Min Bending Radius	70mm
	Applicable Scenes	Dynamic scene
	Number of Cycles Rubber Tracks Complete	10 million cycles
	Packaging Method	Individual package bag
Hardware	Max Operating Voltage	30 VDC
	Certifications	RoHS2.0
Environment	Operating Temperature	-20℃ ~ 80℃