

Data Cable


C04-U3-AM-MicroB(N)



Features

- 1、 Suitable for USB3.0 industrial cameras,Maximum transmission rate 5.0Gbps
- 2、 Micro B with screws, reliable connection camera
- 3、 With excellent flexibility, to meet the tank chain mobile installation applications
- 4、 Provide a maximum current of 900mA/5V for the device
- 5、 Plug and play, without any other drivers
- 6、 Conform to RoHS 2.0

Dimensions (mm)

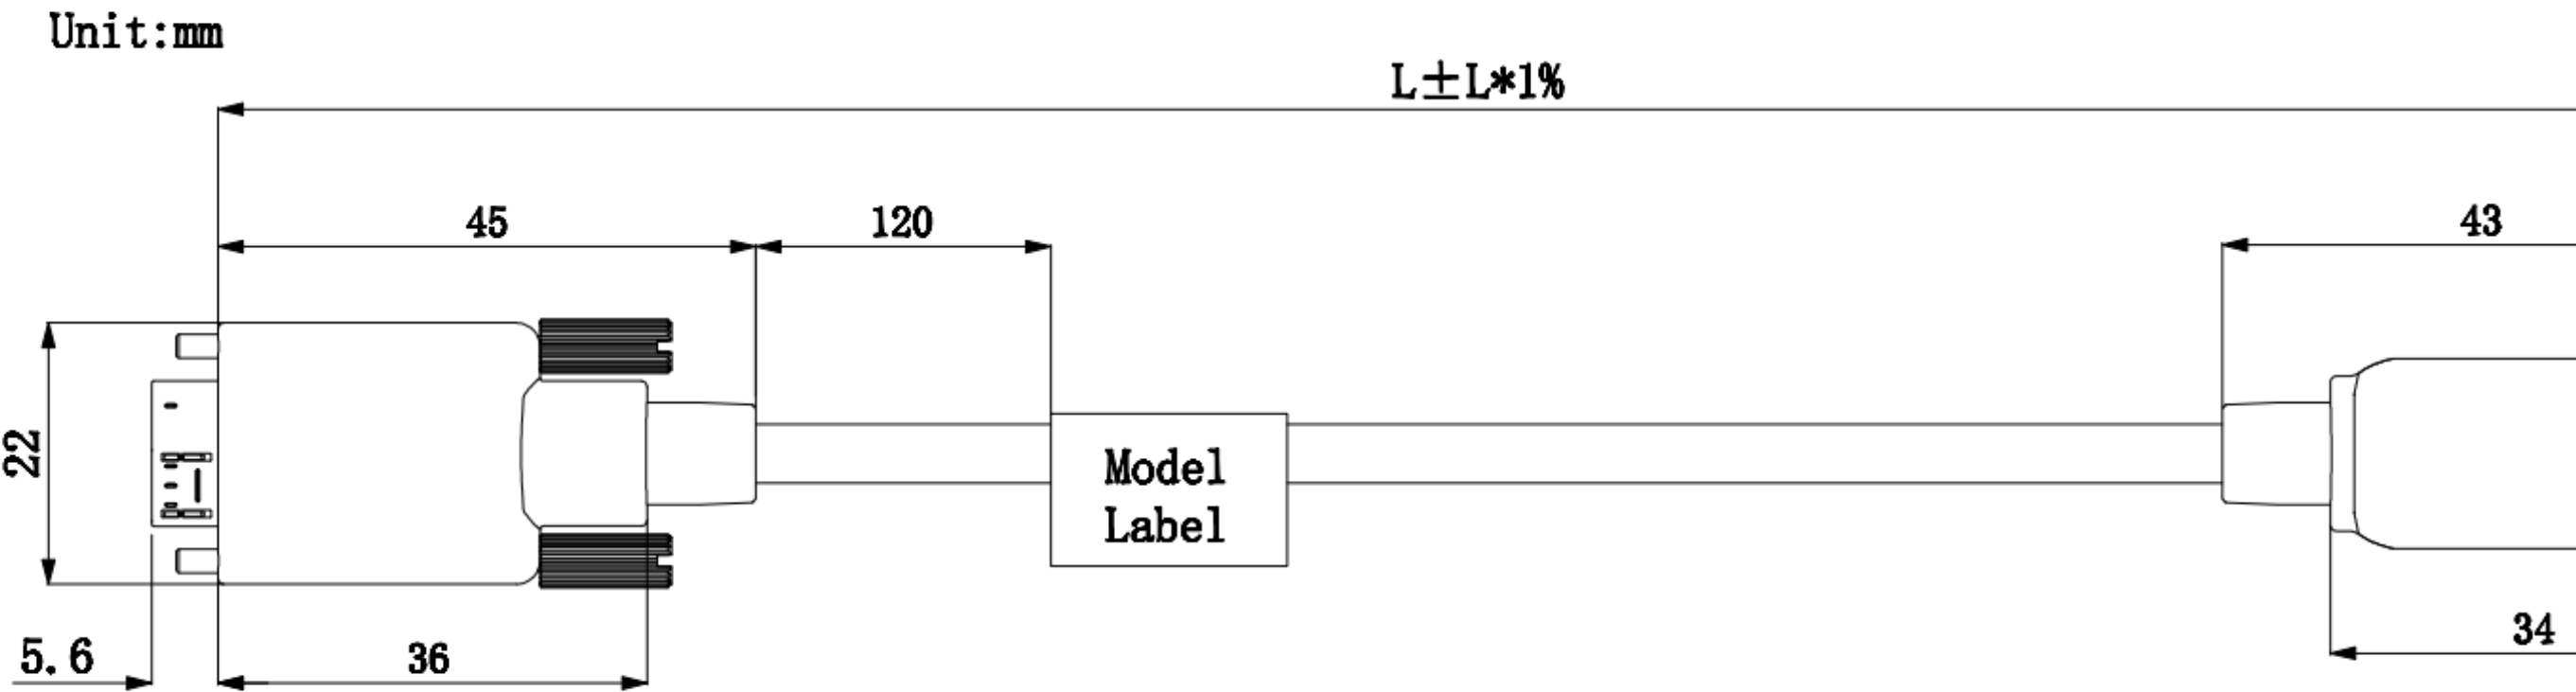

/ Specification

Model		C04-U3-AM-MicroB(N)-OF-15M
Basic	Model	C04-U3-AM-MicroB(N)-OF-15M
	Category	USB3.0 data cable (Micro B to Type A)
	Appearance Color	Black
	Length	15m
	End A Connector	Micro-B male (with locking stud)
	End B Connector	Type A male
Structure	Cable Structure	AOC-Hybrid-UG-2A1b+4*20AWG
	Cable Diameter	4.8mm
	Cable Sheath	TPU
	Connector Durability	≥1000 cycles
	Min Bending Radius	50mm
	Applicable Scenes	Dynamic scene
	Number of Cycles Rubber Tracks Complete	20 million cycles
	Packaging Method	Individual package bag
Hardware	Max Operating Voltage	30 VDC
	Certifications	RoHS2.0
Environment	Operating Temperature	-20℃ ~ 80℃