

5000 series


L5167CPA90



Features

- CoaxPress使用CXP-12，理论带宽4*12.5Gbps
- 真彩16线,支持2TD和4TDI模式
- 支持软件触发/硬件触发/自由运行等多种模式
- 支持自定义ROI、支持水平镜像
- 支持PoCXP供电和DC 24V外部供电
- 兼容CoaXPress协议和GenICam标准
- 符合CE、KC和RoHS

Dimensions (mm)

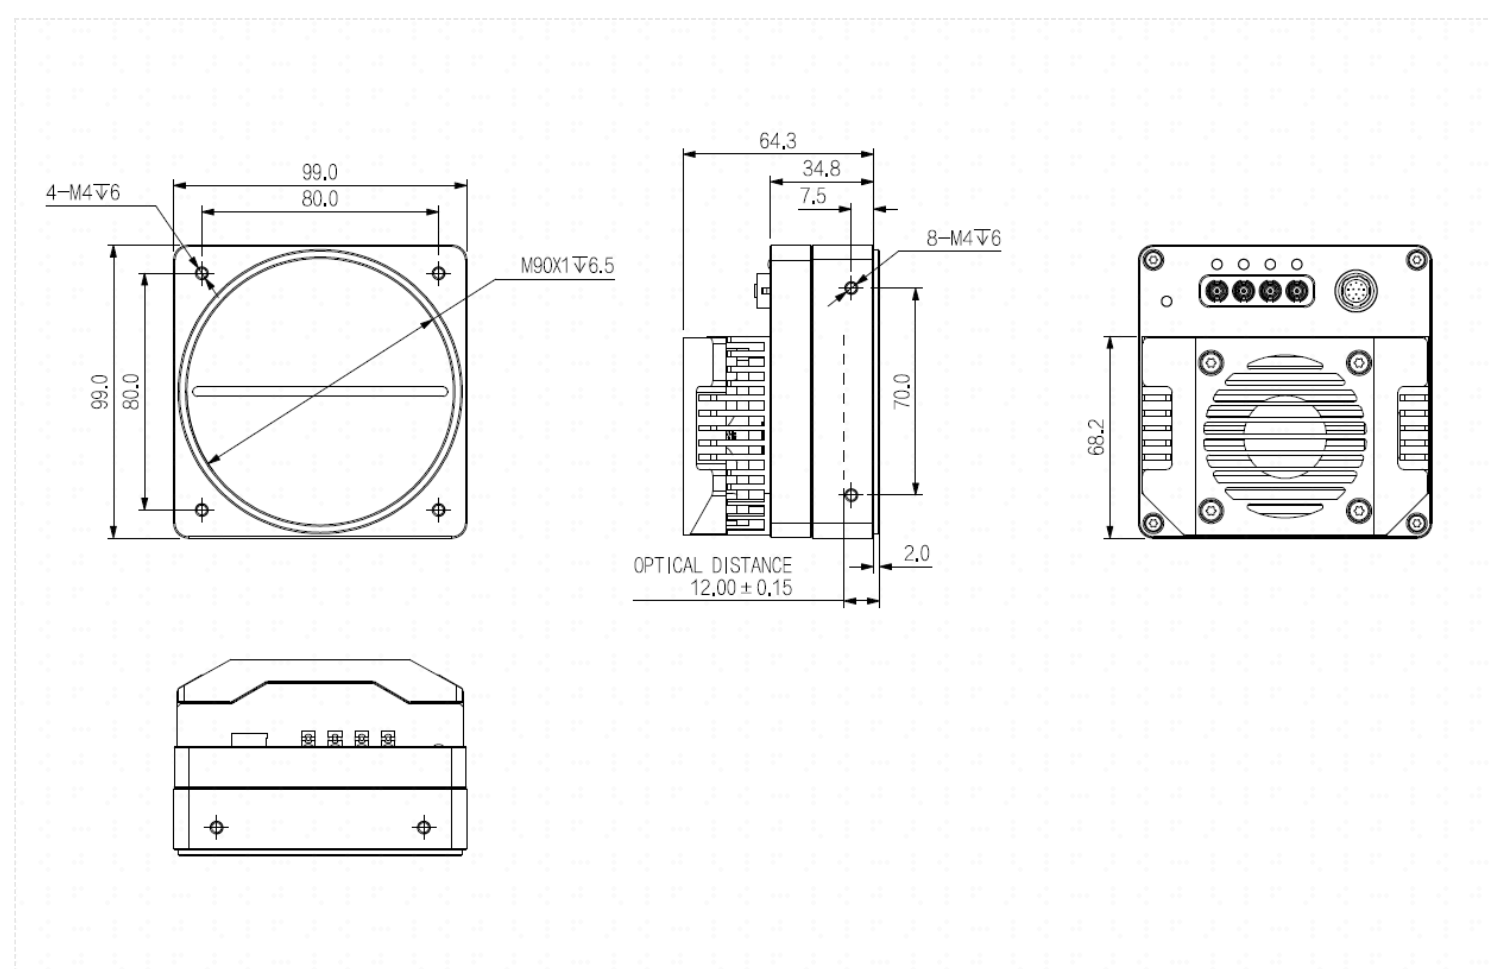

Specification

Model		L5167CPA90
Basic	Image Sensor	CMOS
	Shutter	Global
	Resolution	16384 × 16
	Line Rate	92 kHz(1-Line)、45.3 kHz(2-TDI)、23.1 kHz(4-TDI)
	Bit Depth	12bit
	Mono/Color	Color
	Pixel Size	5 μm × 5 μm
Image	S/N Ratio	39.5dB
	Dynamic Range	68.5dB
	Image Format	RGB8
	Binning	Support
	ROI	Support
	X Flip	Support
	Gain	1~32
	White Balance	Support
	Exposure Time	4μs~100ms
	Trigger Mode	Software Trigger/Hardware Trigger/Free Run Mode
	FPN	Support
Performance	User Setting	Support three sets of user-defined configurations
Port	Port	CXP-12
	GPIO Interface	4 differential input,output and 1 GPIO input,output
	Lens Mount	M90*1, flange back focus 12 mm; can be transferred to F-mount lens via adapter ring
Power	Power Supply	Powered by 12-pin Hirose interface, DC24V, supports PoCXP
	Power Consumption	21W @24 VDC
Structure	Product Dimensions	99 mm × 99 mm × 65 mm (Non including rear case connector)
	Net Weight	About 930g
Environment	Storage Temperature	-30℃~+80℃
	Operating Temperature	-30℃~+50℃