

R3000 Series


R3004MG-05H-DEE01E



Features

- Built-in Red/white dual light, integrated design;
- Support multiple trigger modes such as software trigger/external trigger/free run;
- Industrial Ethernet interface, provides 100M bandwidth;
- Rich IO interface such as Ethernet, RS232, GPIO;
- 9–26V DC power supply, consumption no more than 2.5W;
- Abundant decoding algorithms, 1D: CODE128/EAN/CODE39/CODE93/CODEBAR/ITF25 etc., 2D: DM/QR/DPM etc.

Dimensions (mm)

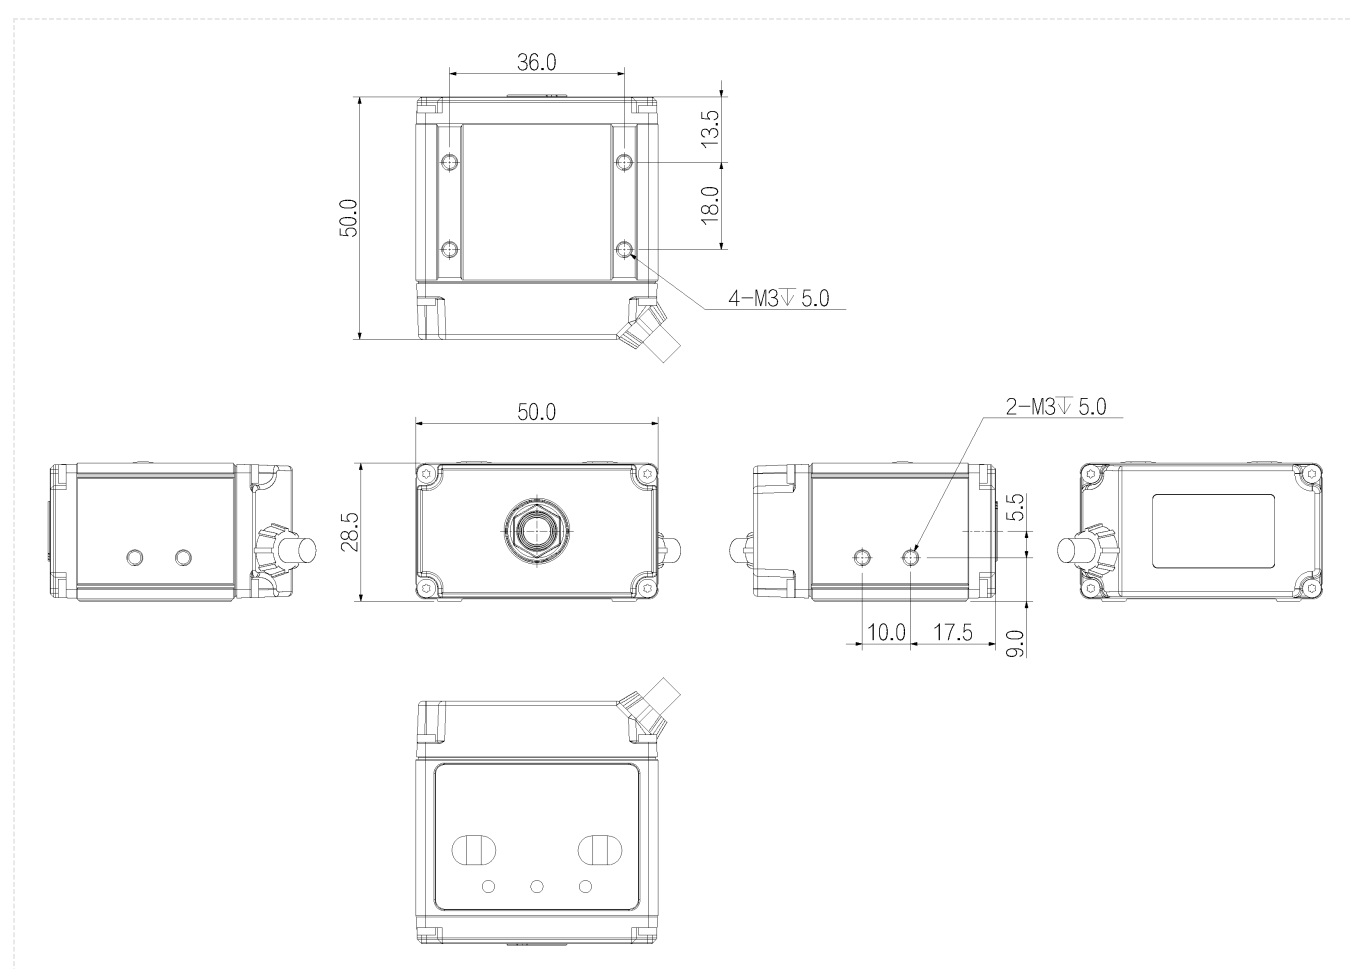

 Specification

Model		R3004MG-05H-DEE01E
Basic	Resolution	640 × 512
	Max. Frame rate	60 fps
	Shutter Mode	Global
	Mono/Color	Mono
	Lens Mount	M8
	Trigger Mode	Support multiple trigger modes such as software trigger/external trigger/free run;
	Software	EasyID
	Certifications	CE , KC
	Function	ID: Code 39/Code 93/Code128/CodaBar/EAN8/EAN13/UPCA/UPCE/ITF25/2of5 (Industrial2of5) /standard25/GS1-128 etc. and 2D: Data Matrix/MQR/GS1 DM/GS1QR etc.; Quality Evaluation: ISO/IEC 29158(AIM-DPM), ISO/IEC 15415, ISO/IEC 15416)
	Focal Length	4.8 mm
	Focus Control	Manual control
	Light Source Type	Red/white dual light
Performance	Working Distance	40 - 150 mm
	Field of View (FOV)	31 × 24 mm - 110 × 88 mm
	Max. Read Speed	42 codes/s
	Min. Resolution	1D code 0.06mm / 2D code 0.13mm
	Sight	Red light indication
Port	Connector	Industrial-grade M12 connectors are Ethernet and GPIO interfaces
	Network Port	100M Ethernet
	GPIO Interface	1x RS232 interface, 1x Opto-isolated input, 1x Opto-isolated output, 1 configurable input and output
	Communication Mode	RS232, Ethernet
	Communication protocol	SDK , TCP Client , FTP , TCP Server , RS232 , Profinet、Modbus、EtherNet/IP、MCUdp、MCTcp、FinsUDP、FinsTCP、MELSEC
	LED Indicator	Power indicator, Network indicator, Result indicator
Power	Power Supply	Support DC 9V ~ 26V wide range voltage input
	Power Consumption	<2.5W
Structure	Product Dimensions	50 mm × 50 mm × 28.5 mm (Without cable)
	Net Weight	< 130 g
	Ingress Protection	IP40
	Casing Material	Aluminum alloy + Front cover
	Operating Temperature	-15℃ ~ +50℃

Environment	Operating Humidity	20% ~ 95%, Non condensing
	Storage Temperature	-30°C ~ +70°C

Connector Pin-out

12 pin-out on camera:

Pin	Signal	Description	Cable Color	
1	Power	Power		Red
2	POWER_GND	Power GND		Black
3	OPT_OUT0	Opto-isolated output		Brown
4	OPT_GND	Opto-isolated GND		Purple white
5	OPT_IN0	Opto-isolated input		Yellow
6	GPIO	Configurable IO		Blue
7	MD1_P	RJ45 port		Green
8	MD1_N	RJ45 port		Green white
9	MD0_P	RJ45 port		Orange
10	MD0_N	RJ45 port		Orange white
11	RS232_RXD	Received data		Purple
12	RS232_TXD	Transmit data		Grey

12-pin assignment on camera

